

# Rose Wood Glazed Porcelain




## Off White



TCRROS29AT - 8" x 36"  
 TCRROS36AP - 12" x 24" - Polished  
 TCRROS36AT - 12" x 24"  
 TCRROS39AT - 12" x 36"

## Beige

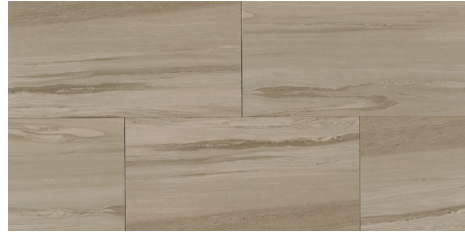

TCRROS29BT - 8" x 36"  
 TCRROS36BP - 12" x 24" - Polished  
 TCRROS36BT - 12" x 24"  
 TCRROS39BT - 12" x 36"

## Camel



TCRROS29CT - 8" x 36"  
 TCRROS36CP - 12" x 24" - Polished  
 TCRROS36CT - 12" x 24"  
 TCRROS39CT - 12" x 36"

## Silver



TCRROS29ST - 8" x 36"  
 TCRROS36SP - 12" x 24" - Polished  
 TCRROS36ST - 12" x 24"  
 TCRROS39ST - 12" x 36"

## Taupe



TCRROS29TT - 8" x 36"  
 TCRROS36TP - 12" x 24" - Polished  
 TCRROS36TT - 12" x 24"  
 TCRROS39TT - 12" x 36"

## Size

Shape	Size	Sq Ft/Ctn	Pcs / Ctn
	8"x36" Field Tile (20 cm x 90 cm)	16.00	8
	12"x24" Field Tile (30 cm x 60 cm)	18.00	9
	12"x36" Field Tile (30 cm x 90 cm)	18.00	6

## Mosaic

Shape	Size	Sheet Size	Pcs / Ctn
	Polished Listello (Mesh-mounted on a 6"x16" sheet)	(Sheet 6"x16") (Sheet 15 cm x 40 cm)	12
	1 1/2"x1 1/2" Polished Mosaic (Mesh-mounted on a 12"x12" sheet)	(Sheet 12"x12") (Sheet 30 cm x 30 cm)	12

## Trim

Shape	Type	Item Code	Size	Pcs / Ctn
	Bullnose Polished/Textured	TCRROSS324•P TCRROSS324•T	3"x24"	26

## Technical Specifications


Description	Results	ASTM#
Water Absorption	≤ 0.50%	C373
PEI Rating	4	C1027
MOHS (Scratch Resistant)	6	MOHS
Frost Resistant	Unaffected	C1026
Breaking Strength	≥ 250 lbs	C648
Chemical Resistant	Unaffected	C650
DCOF Acutest	≥ 0.42	NA

## Product Information

Tile Thickness: 3/8"

Recommended Grout Joint: 3/16"

## Shade Variation



## Icons



Made in China

Glazed Porcelain

Rectified Edge

Ink Jet

## Application

	Interior			Exterior	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors	•	•			
Walls / Backsplashes	•	•	•	•	•
Countertops	•	•	•	•	•
Showers	•	•	•	•	•
Pool Decking					
Pool Lining	•	•	•	•	•